


MCU


UART

The screenshot displays the NIO mobile application interface. At the top, a status bar shows the time as 10:08 and battery level at 100%. The app header includes a back arrow, the text "蔚来汽车", and a user profile icon. Below the header, a message states "您的车辆已充电成功连接" (Your vehicle has successfully connected to charging). A large green circular progress indicator shows the current charge level at 20%, with a sub-label "剩余电量: 20%, 充满需 30min" (Remaining battery: 20%, Full in 30min). To the right, a section titled "请选择充电方案" (Please select a charging plan) offers three options: "30 min" for ¥10.00, "20 min" for ¥7.00, and "10 min" for ¥5.00. The bottom navigation bar contains icons for Home, Search, My Car, and My Account.

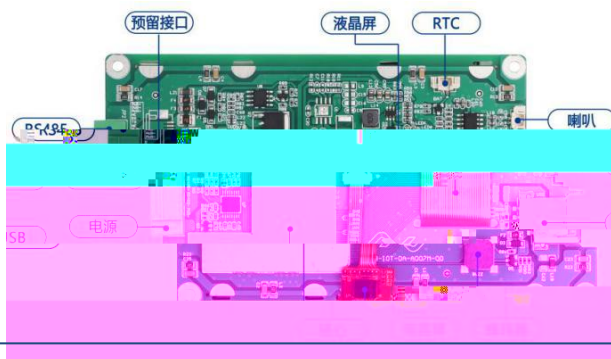

 应用场景

- M4 MCU 512KB Flash 256KB SRAM
- 128Mb
- 3 SCI(UART) 2 SPI
- 2D
- USB2.0/SD , USB SPI
- Flash
-
- 480 *272 1280*1024
-
- DC 5V
- 1Gb Flash
- TTL/RS232 RS485
- RTC
- DAC
-
-
- WIFI/



 应用方块图

